
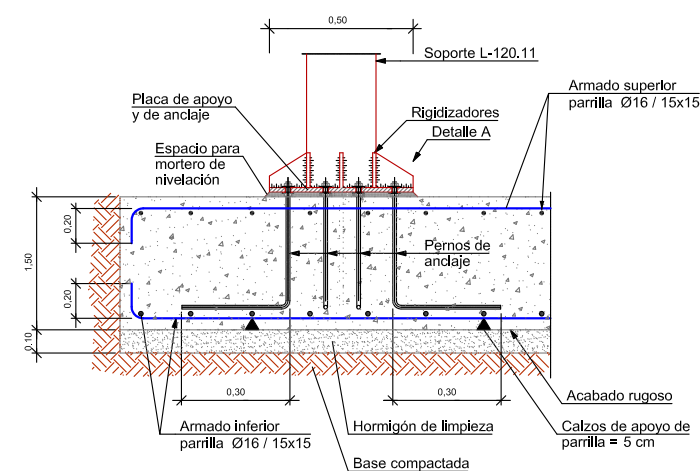
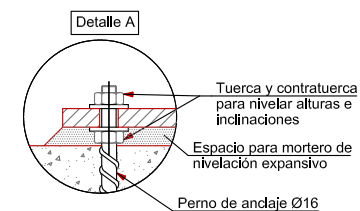


Tramo superior [10-15 metros]

Tramo intermedio [5-10 metros]



Tramo inferior [0-5 metros]

Arranque de soporte perfil en L Unión rígida

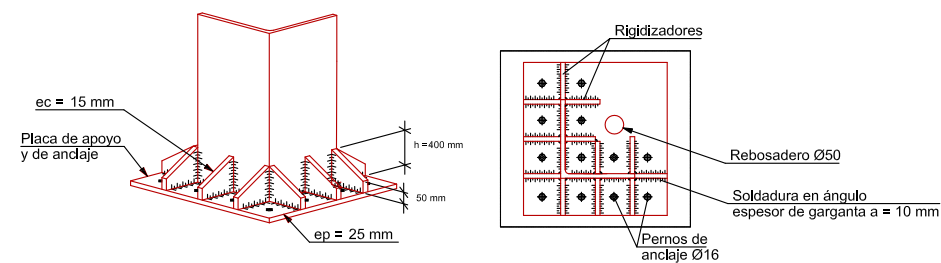

cotas en metros

Detalles y características Cañón Big Gun SRA150

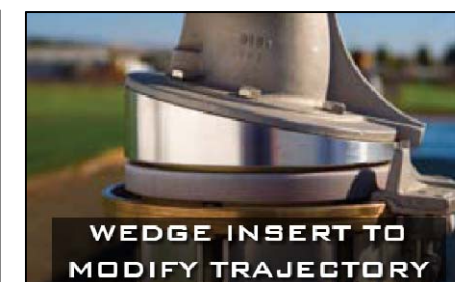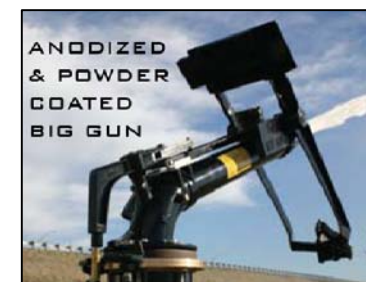

150 TAPER BORE NOZZLE — 24° TRAJECTORY

Kg/cm ²	17.8 mm				20.3 mm				22.9 mm				25.4 mm				27.9 mm				30.5 mm				33.0 mm				35.6 mm			
	L/S	M ³ /H	DIAM. M		L/S	M ³ /H	DIAM. M		L/S	M ³ /H	DIAM. M		L/S	M ³ /H	DIAM. M		L/S	M ³ /H	DIAM. M		L/S	M ³ /H	DIAM. M		L/S	M ³ /H	DIAM. M		L/S	M ³ /H	DIAM. M	
3.5	6.39	23.0	76.0		8.29	29.8	82.0		10.5	37.8	88.0		13.0	46.9	95.0		15.9	57.1	101		19.0	68.3	105		22.3	80.1	110		25.8	92.9	114	
4.0	6.83	24.6	79.6		8.86	31.9	85.6		11.2	40.4	91.6		13.9	50.1	97.8		16.9	61.0	104		20.3	73.0	109		23.8	85.7	114		27.4	98.6	118	
5.0	7.63	27.5	85.4		9.91	35.7	91.6		12.6	45.2	98.6		15.6	56.0	105		18.9	68.2	111		22.7	81.7	117		26.6	95.8	121		30.8	111	126	
6.0	8.36	30.1	89.7		10.9	39.1	96.7		13.8	49.5	104		17.0	61.3	110		20.8	74.7	117		24.9	89.5	123		29.1	105	128		33.6	121	133	
7.0	8.03	32.5	95.0		11.7	42.2	101		14.9	53.5	108		18.4	66.3	114		22.4	80.7	122		26.8	96.6	128		31.5	113	134		36.4	131	139	
8.0	9.66	34.8	99.3		12.5	45.1	105		15.9	57.2	112		19.7	70.8	118		24.0	86.3	126		28.7	103	132		33.7	121	138		38.9	140	145	
9.0	10.2	36.9	104		13.3	47.9	110		16.8	60.6	117		20.9	75.1	123		25.4	91.5	131		30.4	110	137		35.7	129	143		41.1	148	149	